




39 Souhegan Street - P.O. Box 269, Wilton, New Hampshire 03086
 TEL (603) 654-2002 FAX (603) 654-2533
 email: sales@shp-seals.com - website: www.shp-seals.com

ISO 9001:2008 Certified

**SOLDER PREFORMS
 HMMHE CONNECTORS**

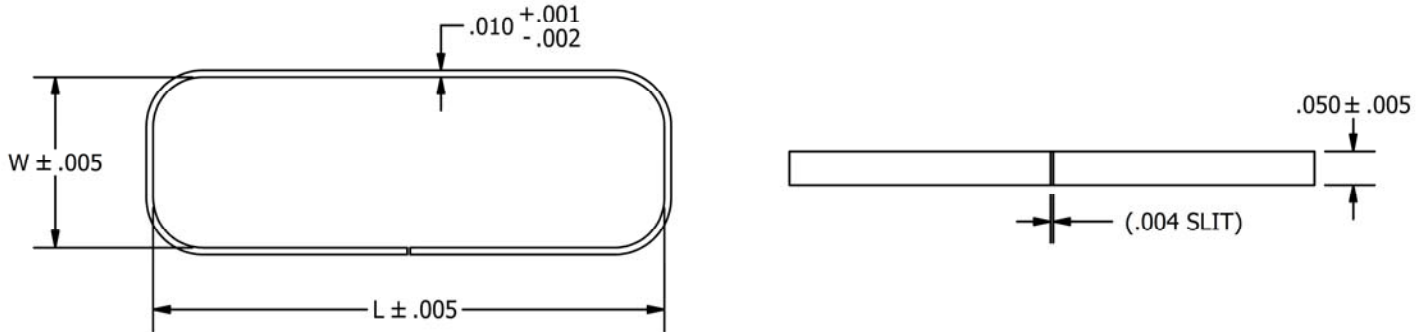

These preforms are designed specifically for SHP HMMHE connectors. They provide optimum flow and fillet when used with the recommended preform well and are available in two solder alloys per EIA J-STD-006: Sn62, Sn63.

CONNECTOR SERIES	NO. OF PINS	PREFORM PART NO. (see note 1)	L	W
HMMHE	5	HMMPF-5P-xx	.750	.250
	7	HMMPF-7P-xx	.840	.250
	9	HMMPF-9P-xx	.930	.250
	11	HMMPF-11P-xx	.840	.330
	14	HMMPF-14P-xx	.935	.330
	20	HMMPF-20P-xx	1.122	.330
	26	HMMPF-26P-xx	1.310	.330
	29	HMMPF-29P-xx	1.403	.330
	34	HMMPF-34P-xx	1.310	.440
	44	HMMPF-44P-xx	1.560	.440

Example Part No. HMMPF-9P-62

NOTES: (1) Insert last 2 digits of desired solder in place of xx (62 or 63).

Solder Melting Temperatures

Sn62 - 179°C (354°F)

Sn63 - 183°C (361°F)

All dimensions are inches.