




39 Souhegan Street - P.O. Box 269, Wilton, New Hampshire 03086  
TEL (603) 654-2002 FAX (603) 654-2533  
email: sales@shp-seals.com - website: www.shp-seals.com

ISO 9001:2008 Certified

**HH Header Connector**

These HH header connectors are designed to mate with our aluminum compatible, hermetic headers to provide highly reliable connections for rigorous environments.

The housing mounted header is easily converted to a connector by the addition of two threaded holes in the housing located in line at the ends of the header. A special adapter is available which converts one of the threaded holes into a key<sup>(4)</sup> while still providing attachment for holding the connector in place.

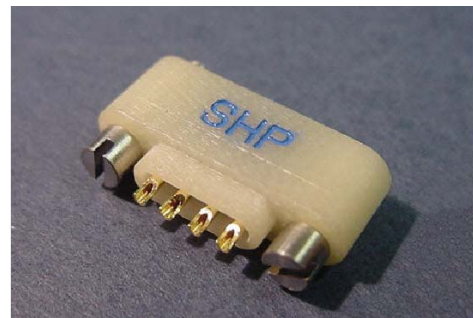

Hardware is captivated to prevent loss.

Connectors provide solder cups for attachment of multi-strand wires #26 and smaller. Also provided are shrink sleeves for the solder connections after soldering. If preferred, potting boots can be provided which facilitates potting after wires are attached. Connectors are available for HH2M, HH80 and HH100 series headers (see bulletin# 800).

**SPECIFICATIONS**

- Connector Body Material - G10/FR4 Fiberglass and insulating epoxy
- Screws - 303 Stainless Steel, Passivated
- Pin Receptacles - Outer shell of Brass alloy 360, plated with 10 microinches Gold over Nickel. Internal contact sleeve of Beryllium Copper alloy 172, plated with 30 microinches Gold over Nickel
- Rating - 3A each with maximum 10°C ΔT
- Insertion Force - Nominal 40 grams for each Ø.020 pin
- Extraction Force - Nominal 30 grams for each Ø.020 pin

SERIES	NO. OF PINS <sup>(1)(2)</sup>					TERMINATION <sup>(3)</sup>
	2	3	4	5	6	
CSSP-2M20	-2P	-3P	-4P	-5P	-6P	-XX
CSSP-8020	-2P	-3P	-4P	-5P	-6P	-XX
CSSP-10025	-2P	-3P	-4P	NOTE (2)	NOTE (2)	-XX

Part# Example: CSSP-8020-4P-SC

- NOTES:
- (1) These pin configurations provide high reliability performance over full Mil temperature range of -55 to +125°C.
  - (2) Connectors are available for higher pin counts but for less severe environments.
  - (3) Insert last 2 digits in place of XX  
-SC indicates Solder Cup  
-SP indicates Straight Pin for flex circuit application
  - (4) Connector Key Part No. : SHP-3852-1




39 Souhegan Street - P.O. Box 269, Wilton, New Hampshire 03086  
TEL (603) 654-2002 FAX (603) 654-2533  
email: sales@shp-seals.com - website: www.shp-seals.com

ISO 9001:2008 Certified

**HH Header Connector**

**APPLICATION DATA**

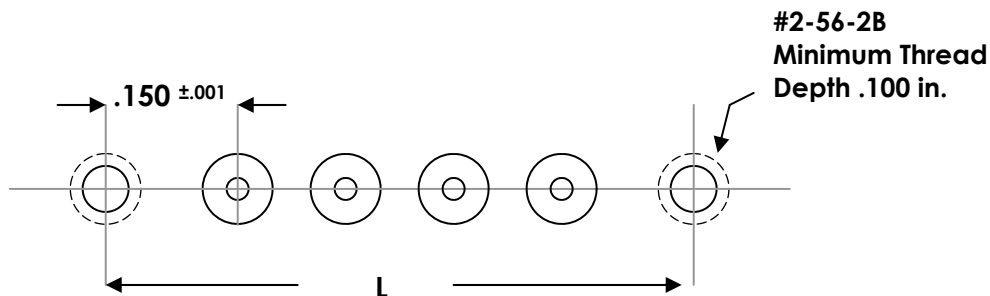

SERIES	L $\pm .002$ (Spacing)				
	2-Pin	3-Pin	4-Pin	5-Pin	6-Pin
CSSP-2M20	.379	.458	.536	.615	.694
CSSP-8020	.380	.460	.540	.620	.700
CSSP-10025	.400	.500	.600	NOTE (2)	NOTE (2)

All dimensions are inches.